TRAILER T-617/6

TECHNICAL SPECIFICATIONS | EQUIPMENT

14 T

HOMOLOGATION
EUROPEAN

WARRANTY
24 months

+

WARRANTY
48 months
on galvanized parts

Year of model 2022

CynkoMet®
Czarna Białostocka

TECHNICAL SPECIFICATIONS	
Type/version/variant	T-4/720/61
Technically (design) permissible total weight rating	21,000 kg*
Gross vehicle weight rating	19,750 kg
including on axles max.	16,750 kg
including on drawbar max.	3,000 kg
Load capacity	15,250 kg*
Unladen mass	~5,750 kg*
Length	7,350 mm
Width	2,530 mm
Height	~2,700 mm*
Cargo box dimensions (length x width x height)	5,100 x 2,300 x 900 mm
Loading surface dimensions	2 000 x 4 960 mm
Cargo capacity	10 m³
Height of floor above ground	~1,385 mm
Tire size	385/65 R22.5
Floor/wall sheet thickness	10mm/6mm
Track of wheels	1,900 mm
Drawbar coupling height - bottom position	500 mm
Drawbar coupling height - top position	750 mm
Max. tolerable vertical load on drawbar	3,000 kg
Coupling height of rear hitch (optional)	720 mm
Transport/working speed	40 km/h
Suspension	parabolic springs
Class of cooperating tractor	100 HP

* - unladen weight and loading capacity may differ depending on the trailer's equipment

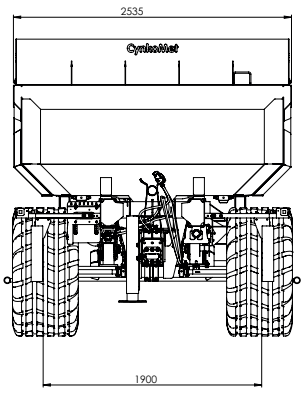

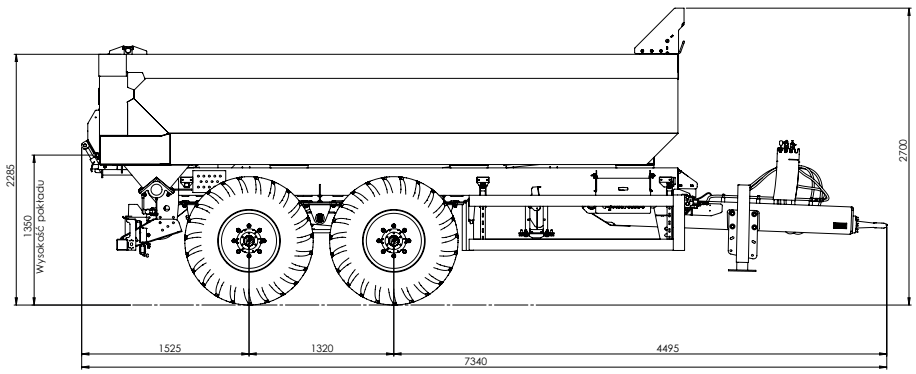

STANDARD MACHINE EQUIPMENT
Wall height 900 mm
New 385/65 R22.5 wheels
Back-tipping box made of HARDOX 500 steel Tuff, floor made of 8 mm sheet, walls made of 5 mm sheet
Rear gravity flap with hydraulic closure, made from 6 mm-thick sheet
Chemical-hardened, dual-ingredient painting materials, with high-grade PPG paints
Axles from the renowned ADR company, homologated (EU 2015/68), bar cross-section - square 100, brake size 406x120 412E, 10 M22x1.5 pins
Two wheel chocks placed in galvanized pockets
Shock-absorbing, homologated, hot-galvanized drawbar with exchangeable hitch eye according to Regulation 55 UN ECE, 50 mm eye
Tipping installation protected against excessive box inclination by cut-off valve
Hydraulic tipping installation of cargo box made of galvanized steel tubes and flexible hoses
Telescopic actuator, eight-level, pitch 2,180 mm. Useful force at eighth level with diameter 53 mm, at nominal pressure 16 MPa = 20 T
Hydraulic connectors to tractor, type ISO 7241-1 DN 12.5
Maintenance support of cargo box hot-galvanized
12V lighting, homologated, rear bulb lamps, LED perimeter lighting, rear socket for connection to second trailer
Lighting installation connector cable with 7PIN 12V plug
Homologated, double-circuit, pneumatic brake system with automatic braking force adjustment from HALDEX, with output for second trailer.
Hot-dip galvanized bottom frame (protection of the structure on the exterior and interior of profiles), stringers of the frame made of 250x150x8 closed sections
Parking handbrake with crank
Hydraulic drawbar support hot-galvanized
Hot-galvanized rear bumper, homologated according to Regulations 2015/504 and 167/2013
Full LED ASPOK lighting installation

All of our agricultural machines are designed and tested by our design team using the latest available tools.
Manufacturing is performed with the greatest diligence and in adherence to rigorous quality standards.

OPTIONAL MACHINE EQUIPMENT
385/ 65R22.5 spare wheel
Surcharge for 445/65 R22.5 wheels
445/65 R22.5 spare wheel
Surcharge for 400/60 22.5 wheels
400/60 22.5 spare wheel
Surcharge for 600/50 R22.5 wheels
600/50 R22.5 spare wheel
Spare wheel winch
Automatic hitch for second trailer
Manual hitch for second trailer
Hydraulic brake system (homologation)
Side underrun guards
Toolbox
Hydraulically closed rear flap
Warning triangle
Hydraulic quick-coupler with pressure neutralizer in hose
Ball hitch tension member dia. 80mm
Extensions for bulk cargo 1000 mm
Tarpaulin frame
Tarpaulin

The data and photographs given in the catalog are for illustrative purposes only. This information may be subject to change as products are continuously improved. The manufacturer reserves the right to change a product's characteristics at any time. Products' specifications may change without notice.

10 m³

14 T

385/65-22.5

HOT-GALVANIZED CONSTRUCTION

CynkoMet®
Czarna Białostocka