

# TRAILER T-678

TECHNICAL SPECIFICATIONS | EQUIPMENT



**HOMOLOGATION  
EUROPEAN**




Year of model 2022

version.1.2022

**CynkoMet**<sup>®</sup>  
Czarna Białostocka

<b>TECHNICAL SPECIFICATIONS</b>	
Load capacity	~5,620 kg*
Unladen mass	~2,880 kg*
Gross vehicle weight rating	8,500 kg
Length	7,500 mm
Width	2,420 mm
Height	~3,050 mm
Cargo box dimensions (length x width x height)	5,975 x 2,250 x 2,000 mm
Loading surface	13.5 m <sup>2</sup>
Height of floor above ground	~1,031 mm
Floor thickness	30mm wood floor
Tire size	11.5/80 15.3
Track of wheels	2,000 mm
Drawbar coupling height - bottom position	436 mm
Drawbar coupling height - top position	856 mm
Max. tolerable vertical load on drawbar	1,000 kg
Max. tolerable load on driving axle	4,000 kg
Transport/working speed	40 km/h
Suspension	tandem on leaf spring
Class of cooperating tractor	60 HP

\* - unladen weight and loading capacity may differ depending on the trailer's equipment

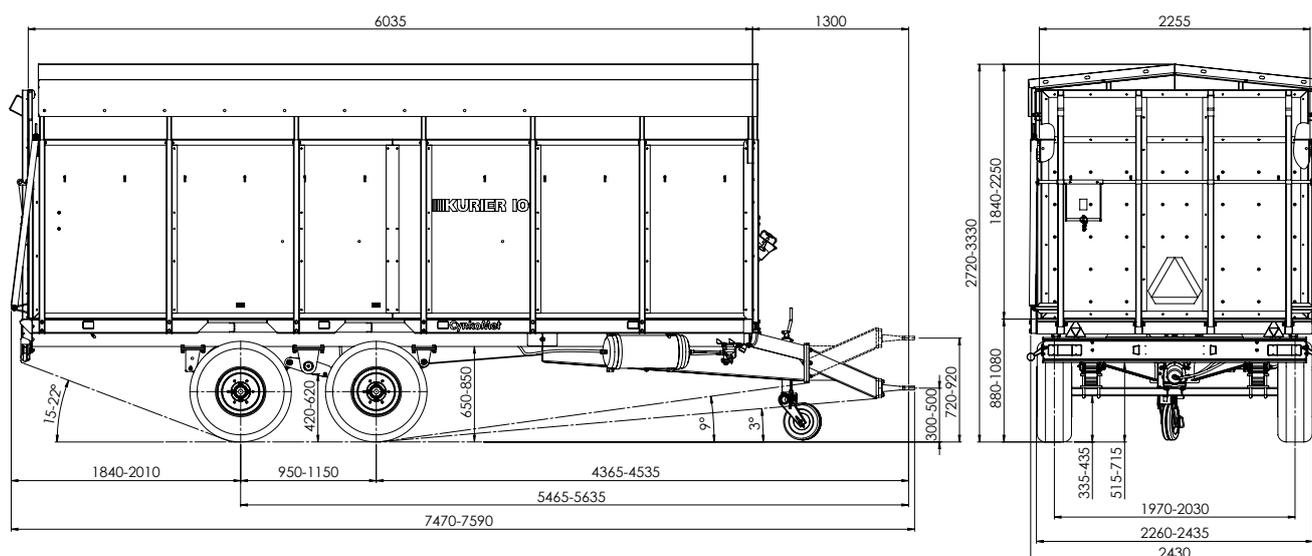

## STANDARD MACHINE EQUIPMENT

New 11.5/80-15.3 wheels

Walls - water-resistant plywood with film coating on both sides

Axles from the renowned ADR company, homologated (EU 2015/68), bar cross-section - square 70, brake size 300x60 306E, 6 M18x1.5 pins

Impregnated wood floor

Rigid drawbar for coupling with the top or bottom hitch of the tractor, with replaceable 50mm eye, drawbar homologated according to Directive EU 2015/208

Two wheel chocks placed in galvanized pockets

12V lighting, homologated, with bulbs, LED perimeter lighting

Lighting installation connector cable with 7PIN 12V plug

Two-line pneumatic brake system

Parking handbrake with crank

Springs to facilitate the opening of the rear wall

Unfolding side barriers, hot-dip galvanized

Hot-dip galvanized frame for tarpaulin

Straight drawbar support with collapsible steel wheel, partially hot-galvanized

*All of our agricultural machines are designed and tested by our design team using the latest available tools.  
Manufacturing is performed with the greatest diligence and in adherence to rigorous quality standards.*

<b>OPTIONAL MACHINE EQUIPMENT</b>
<b>Structural elements</b>
Hot-galvanized sheet walls
Interior partition
4 mm aluminum floor
Side door
Watertight anti-slip plastic tub (polyurea)
Coating of rear ramp with anti-skid polyurea
<b>Driving system</b>
11.5/80-15.3 spare wheel, standalone
Surcharge for 400/60 - 15.5 wheels
400/60-15.5 spare wheel, standalone
<b>Installations</b>
Overrun brake (homologation up to 40 km/h)
Full LED lighting
<b>Other equipment</b>
Laced tarpaulin
Drain with ball valve
Warning triangle
50 mm drawbar eye (does not apply to overrun brake)



The data and photographs given in the catalog are for illustrative purposes only. This document and the information it contains, including prices, do not constitute a commercial offer within the meaning of art. 66 of the Civil Code. This information may be subject to change as products are continuously improved. The manufacturer reserves the right to change a product's characteristics at any time. Products' specifications may change without notice.



**HOT-GALVANIZED CONSTRUCTION**