

MANURE SPREADER N-233/4-2

TECHNICAL SPECIFICATIONS | EQUIPMENT



Year of model 2022


version.1.2022

CynkoMet[®]
Czarna Białostocka

TECHNICAL SPECIFICATIONS	
Load capacity	~3500 kg*
Gross vehicle weight rating	5,540 kg
Unladen mass	~2,040 kg*
Length	5830 mm
Width	2105 mm
Height	2720 mm
Width of cargo box interior	1735 mm
Box wall height	500 mm
Floor/wall sheet thickness	4/2 mm
Height of platform from base	1075 mm
DETAILED SPECIFICATIONS	
Loading surface	6.5 m2
cargo capacity	3.2 m3
Track of wheels	1,500 mm
Drawbar coupling height - bottom position	420 mm
Drawbar coupling height - top position	880 mm
Tire size	11.5/80-15.3
Suspension	rigid axle
Design speed	30 km/h
Minimum demand for tractor power	45 HP
Spreading width	~4-6 m**

* - unladen mass and loading capacity may vary depending on equipment

** - spreading width may differ from the specified width depending on the material used

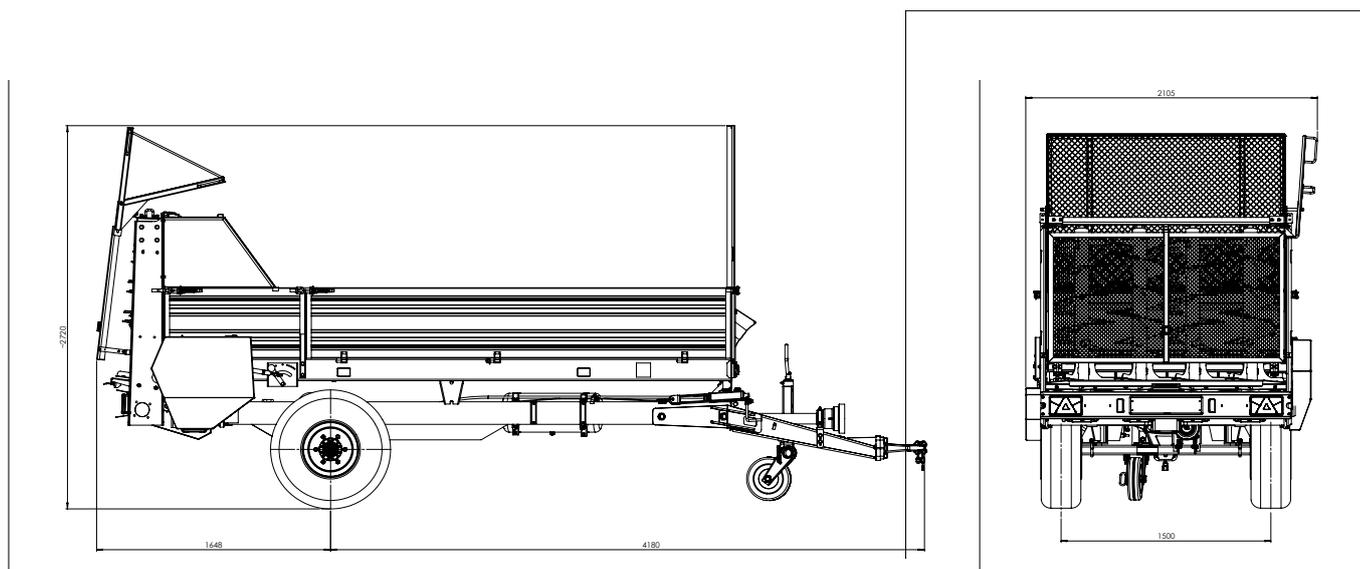

STANDARD MACHINE EQUIPMENT
Structural elements
Wall height 500 mm with thickness 2 mm, hot-galvanized (opening)
A4VS adapter - 4 vertical worm drums
Hot-galvanized homologated swivel drawbar for coupling to the top or bottom tractor hitch, with exchangeable 50 mm or 40 mm eye (e20*2015/208*2015ND*00024*00)
Parking handbrake with crank
Straight drawbar support with collapsible steel wheel
Hot-galvanized frame made of metallurgical 160 channel sections
Hot-galvanized adapter
Hot-galvanized conveyor chain, thickness 11 mm
Exchangeable floor made of hot-galvanized flat sheet, thickness 4 mm
Exchangeable, hot-galvanized conveyor strips made of 50x25x3 profile
Mechanical advance of conveyor with 9-level regulation
Star wheels made of spheroidal graphite iron
Installations
12V lighting, bulbs
Lighting installation connector cable with 7PIN 12V plug
Single-line pneumatic brake system
Driving system
New 11.5/80-15.3 wheels
Axles from renowned company - ADR
Other elements
Two wheel chocks placed in galvanized pockets

All of our agricultural machines are designed and tested by our design team using the latest available tools. Manufacturing is performed with the greatest diligence and in adherence to rigorous quality standards.

OPTIONAL MACHINE EQUIPMENT
Structural elements
Wall extensions (rear wall included in set) 500mm
Rear wall (sideboard) 500 mm
Hydraulic rear wall (in front of adapter)
Driving system
New 400/60- 15.5 wheels
Installations
Hydraulic brake installation
Two-line pneumatic brake system
Full LED lighting
Other equipment
Articulated shaft for coupling to tractor
Wide-angle PTO - articulated shaft for coupling to tractor
Warning triangle
Drawbar eye 40 mm
Deflector

DISCOUNTS ON THE GIVEN PRICES ARE GRANTED INDIVIDUALLY BY AUTHORIZED DEALERS OF THE CYNKOMET BRAND



The data and photographs given in the catalog are for illustrative purposes only. This document and the information it contains, including prices, do not constitute a commercial offer within the meaning of art. 66 of the Civil Code. This information may be subject to change as products are continuously improved. The manufacturer reserves the right to change the product's characteristics at any time. Product specifications may change without prior notice.



**HOT-
GALVANIZED CONSTRUCTION**