# **BOX SZ-1**

## TECHNICAL SPECIFICATIONS | EQUIPMENT



















### |Suspended box SZ-100 | 1.5 TONS

TECHNICAL SPECIFICATIONS	
Load capacity	1,500 kg
Gross vehicle weight rating	19,800 kg
Kerb weight (without wall extensions)	480 kg
Length	1837 mm
Width	2130 mm
Height	896 mm
DETAILED SPECIFICATIONS	
Length of cargo box interior	1800 mm
Width of cargo box interior front/rear	2100 mm
Box wall height	500 mm
Loading surface	3 m2
cargo capacity	1.2 m3
Floor/wall sheet thickness	3/2 mm
Aggregation with a tractor	3-point suspension system
Class of cooperating tractor	70 HP
Tipping angle of the cargo box (backward / sideways)	50°
Tipping system	three-way



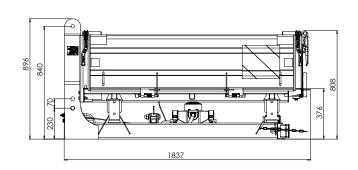



#### STANDARD MACHINE EQUIPMENT

#### Structural elements

Lighting installation connector cable with 7PIN 12V plug

12V lighting, homologated, for bulbs

Top and bottom frame hot-galvanized (structure protected on exterior and interior of profiles)

Hot-galvanized side walls - opening from the top and bottom

Telescopic actuator with articulated suspensions, five-level with 840 mm pitch. Useful force at fifth level with diameter 105mm, at nominal pressure 15MPa = 13T

#### **OPTIONAL MACHINE EQUIPMENT**

#### Structural elements

Hot-galvanized mesh wall extensions 1,000 mm





The data and photographs given in the catalog are for illustrative purposes only. This document and the information it contains, including prices, do not constitute a commercial offer within the meaning of art. 66 of the Civil Code. This information may be subject to change as products are continuously improved. The manufacturer reserves the right to change a product's characteristics at any time. Products' specifications may change without notice.









All of our agricultural machines are designed and tested by our design team using the latest available tools. Manufacturing is performed with the greatest diligence and in adherence to rigorous quality standards.



